



CONERGY


Photovoltaic modules | Technical Data

Conergy PowerPlus 190P-230P

**Innovative and long-lasting power “Made in Germany”:
State of the art solar modules from the world’s most
modern solar plant.**

Conergy PowerPlus solar modules are completely developed, produced and stringently tested in accordance with the new IEC 61730 safety standard in Germany. The state-of-the-art fully automatic production process in operation at our factory in Frankfurt/Oder ensures that our modules meet the very highest quality standards. An exceptionally low power tolerance of $\pm 3\%$ means that customers actually get the module power output they expect. However, it isn't only the power which fits: with their 4 mm thick solar glass and their sturdy frame, the highly stable modules can withstand loads of up to 5,400 Pascal. This means that Conergy PowerPlus solar modules are also suitable for use in extreme ambient conditions.

Conergy PowerPlus – the perfect combination of maximum safety and stability, high performance and top quality.

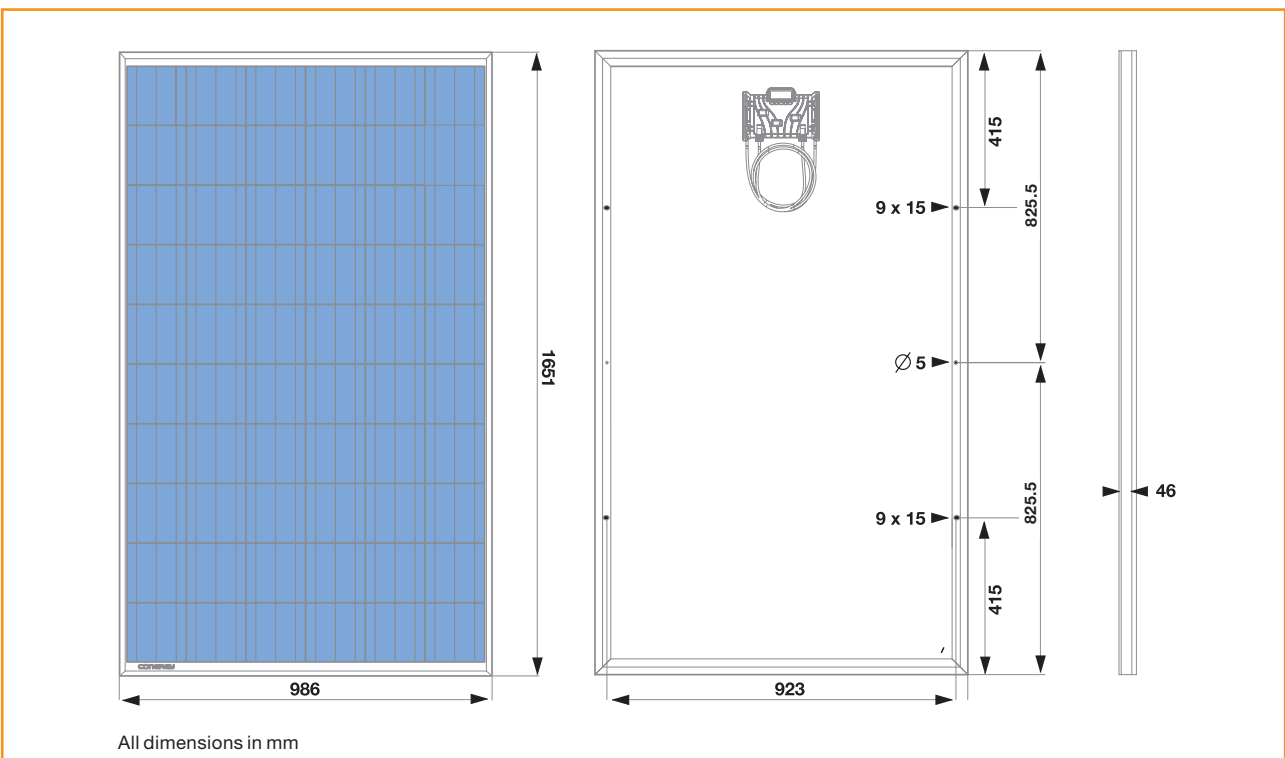

PHOTOVOLTAICS



CONERGY

Photovoltaic modules | Technical Data

Conergy PowerPlus 190P-230P

	Conergy PowerPlus 190P	Conergy PowerPlus 200P	Conergy PowerPlus 210P	Conergy PowerPlus 220P	Conergy PowerPlus 230P
Max. output					
(P_{MAX}) as per STC¹	190 Wp	200 Wp	210 Wp	220 Wp	230 Wp
Performance tolerance	±3 %	±3 %	±3 %	±3 %	±3 %
Module efficiency	11.67 %	12.29 %	12.9%	13.51 %	14.13 %
MPP voltage (V_{MPP})	28.2 V	28.6 V	29.1 V	29.5 V	30.0 V
MPP current (I_{MPP})	6.72 A	7.01 A	7.24 A	7.47 A	7.67 A
Open-circuit voltage (V_{OC})	36.0 V	36.2 V	36.4 V	36.6 V	36.8 V
Short-circuit current (I_{SC})	7.66 A	7.86 A	7.93 A	8.0 A	8.08 A
Temperature coefficient (P_{MPP})	-0.45 %/K	-0.45 %/K	-0.45 %/K	-0.45 %/K	-0.45 %/K
Temperature coefficient (V_{OC})	-0.127 V/K	-0.127 V/K	-0.127 V/K	-0.130 V/K	-0.130 V/K
Temperature coefficient (V_{OC})	-0.35 %/K	-0.35 %/K	-0.35 %/K	-0.35 %/K	-0.35 %/K
Temperature coefficient (I_{SC})	2.1 mA/K	2.1 mA/K	2.1 mA/K	2.1 mA/K	2.1 mA/K
Temperature coefficient (I_{SC})	0.029 %/K	0.028 %/K	0.027 %/K	0.026 %/K	0.026 %/K
Maximum system voltage	1,000 V	1,000 V	1,000 V	1,000 V	1,000 V
Cells polycrystalline	60	60	60	60	60
Cell dimensions	156 × 156 mm	156 × 156 mm	156 × 156 mm	156 × 156 mm	156 × 156 mm
Thickness of glass	4 mm	4 mm	4 mm	4 mm	4 mm
Length of cables	2 × 1000 mm	2 × 1,000 mm	2 × 1,000 mm	2 × 1,000 mm	2 × 1,000 mm
DC plugs	Huber+Suhner	Huber+Suhner	Huber+Suhner	Huber+Suhner	Huber+Suhner
Module dimensions (L × W × H)	1,651 × 986 × 46 mm	1,651 × 986 × 46 mm	1,651 × 986 × 46 mm	1,651 × 986 × 46 mm	1,651 × 986 × 46 mm
Weight	23 kg ±1 kg	23 kg ±1 kg	23 kg ±1 kg	23 kg ±1 kg	23 kg ±1 kg
Certification (in process)	IEC 61215 Ed. 2, IEC 61730				
Product warranty²	5 years				
Output warranty of P_{MIN}²	12/90 years/%				
Output warranty of P_{MIN}²	25/80 years/%				

Available from:

¹ Standard Test Conditions, which are defined as follows: radiation output of 1,000 W/m² at a spectral density of AM 1.5 (ASTM E892). Cell temperature of 25 °C.

² According to current Conergy warranty conditions.

PHOTOVOLTAICS